

S10V / S14V / S16V user guide

Origen^æ



S10V / S14V / S16V user guide

Thank you for purchasing this Origen^{ae} htpc enclosure. We recommend that you read this user guide thoroughly before installation.

Origen^{ae} has rapidly grown to be one of the worlds leading HTPC enclosure manufacturers since its inception in 2000. We were one of the first companies with the vision to produce high end htpc enclosures that harmonise with mainstream audio visual equipment, allowing the pc to leave the office and fit effortlessly into the living room environment.

We are driven by the passion to produce exceptional products that push technical and aesthetic boundaries to new levels.

For more information on all of our products, visit www.origenae.com

Origen^{ae} is not responsible for any damages due to external causes, including but not limited to, improper use, problems with electrical power, accident, neglect, alteration, repair, improper installation or improper testing.

SVUG.V2/01.2010

Copyright © 2010 Origen^{ae} Technology
All rights reserved



index

S10V

S10V overview.....	4
Opening the case.....	7
Optical disk drive installation	9
Hard drive installation.....	9
Auxiliary access slot.....	11
IR Blaster installation.....	11
Multi-format card reader & I/O ports	12
PCB/cable reference diagram.....	13
Installing VFD/IR Software.....	14

S14V / S16V



S14V overview.....	5
S16V overview.....	6
Opening the case.....	7
ODD cage removal.....	7
Optical disk drive installation	7
Metal sticker fitting instructions.....	8
Optical drive bezel installation.....	8
Hard drive installation.....	10
Auxiliary access slot [S14V].....	11
IR Blaster installation [S14V].....	11
Micro ATX standoffs [S16V only].....	11
Multi-format card reader & I/O ports	12
PCB/cable reference diagram.....	13
Installing VFD/IR Software.....	14

S10V overview

These are the main features and controls of the S10V htpc enclosure.

- 1 Power button
- 2 Power LED ring
- 3 One piece aluminum chassis
- 4 VFD/IR acryl window
- 5 Top panel
- 6 Slot for optical disk drive (ODD)
- 7 ODD eject button
- 8 Soft-eject access panel
- 9 I/O ports/multi-format card reader
- 10 Door latch
- 11 2 x 60mm low dB exhaust fans
- 12 I/O ports/card reader PCB
- 13 ODD bracket
- 14 Philips IR controller* fixing point
- 15 Hard drive mount brackets
- 16 VF310 VFD/IR module
- 17 HD chassis mount
- 18 2 x 60mm low dB intake fans
- 19 Auxiliary access slot
- 20 Top panel fixing screw
- 21 Philips IR blaster* fixing point
- 22 PSU intake vent (when isolated)

*part of an optional IR kit (IR221)

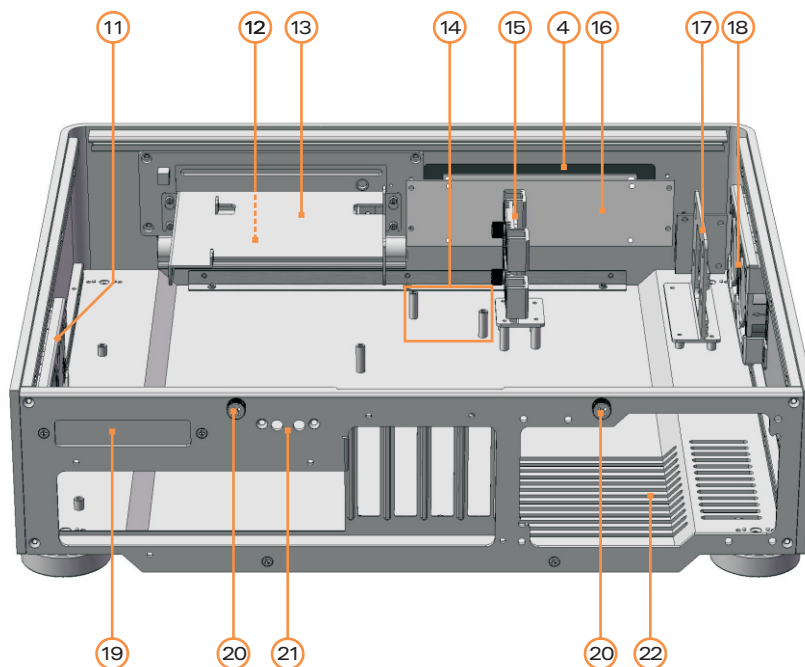
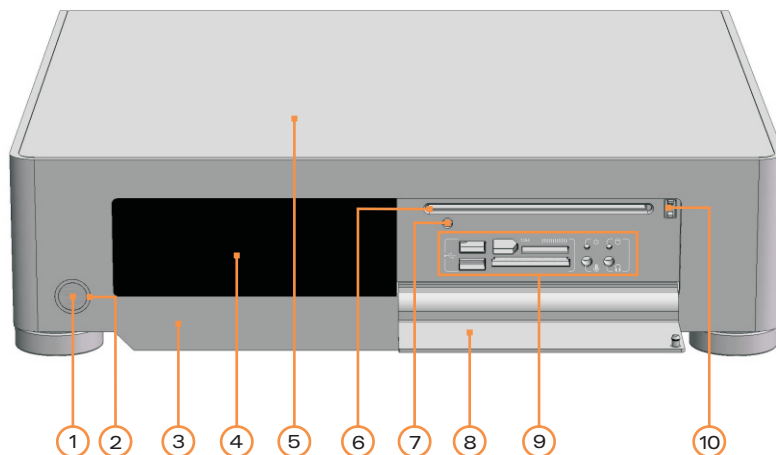


S14V overview

These are the main features and controls of the S14V htpc enclosure.

- 1 Power button
- 2 Power LED ring
- 3 One piece aluminum chassis
- 4 VFD/IR acrylic window
- 5 Top panel
- 6 Optical disk drive (ODD) bezel
- 7 Soft-eject access panel
- 8 I/O ports/multi-format card reader
- 9 ODD eject button
- 10 Door latch
- 11 Intake vent
- 12 I/O ports/card reader PCB
- 13 ODD cage
- 14 4th HD mount bracket
- 15 Philips IR controller* fixing point
- 16 VF310 VFD/IR module
- 17 Primary hard drive cage
- 18 Side intake vent
- 19 92mm low dB fan
- 20 Auxiliary access slot
- 21 Top panel fixing screw
- 22 Philips IR blaster* fixing point
- 23 60mm low dB fan

*part of an optional IR kit (IR221)

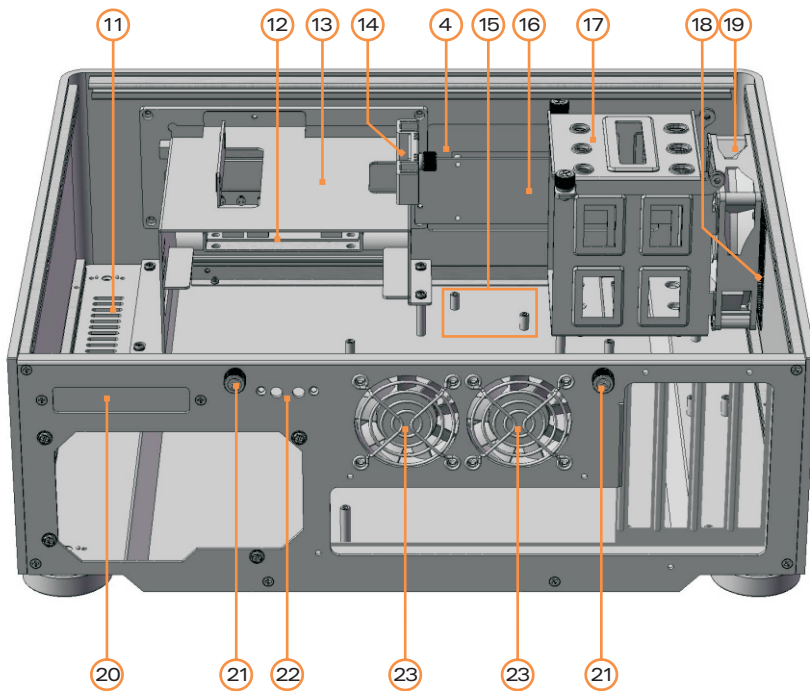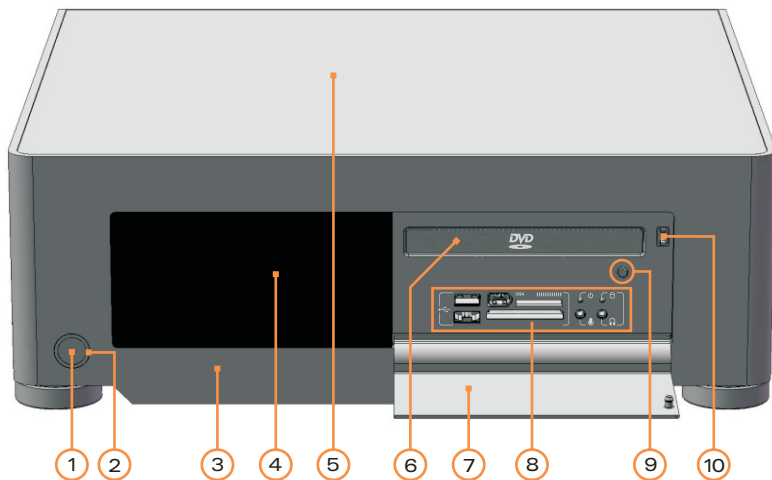




S16V overview


These are the main features and controls of the S16V htpc enclosure.

- 1 Power button
- 2 Power LED ring
- 3 One piece aluminum chassis
- 4 VFD/IR acryl window
- 5 Top panel
- 6 Optical disk drive (ODD) bezel
- 7 Soft-eject access panel
- 8 I/O ports/multi-format card reader
- 9 ODD eject button
- 10 Door latch
- 11 Fixing point for HM100⁺ (see 23)
- 12 Intake vent
- 13 I/O ports/card reader PCB
- 14 ODD cage
- 15 4th HD mount bracket
- 16 Philips IR controller* fixing point
- 17 VF310 VFD/IR module
- 18 Primary hard drive cage
- 19 Side intake vent
- 20 92mm low dB fan
- 21 Top panel fixing screw
- 22 80mm low dB fan
- 23 HM100⁺ hard drive mount (allows a 5th HD to be installed)

*optional accessory

*part of an optional IR kit (IR221)

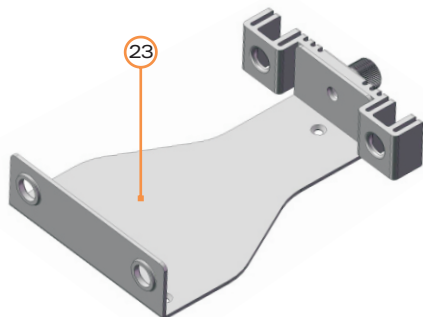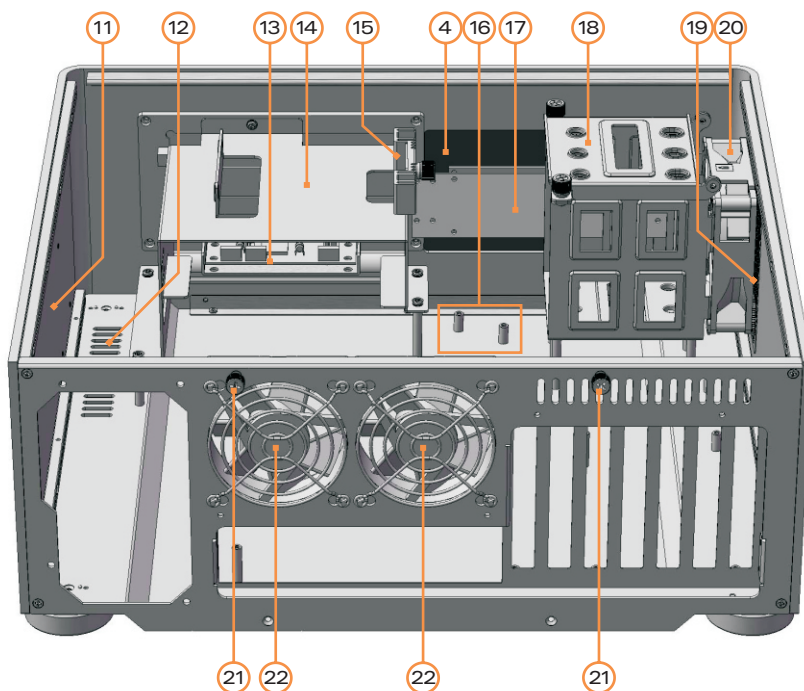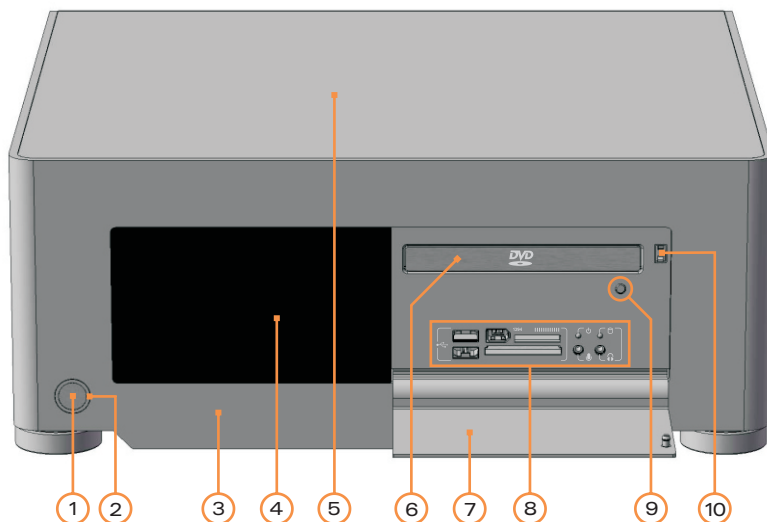

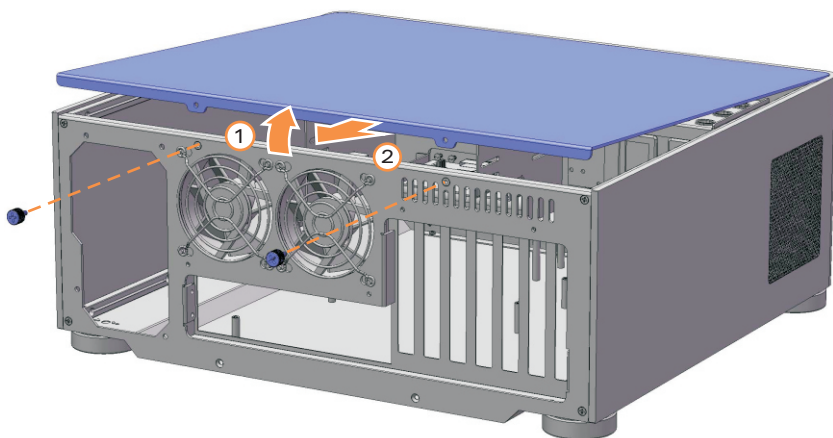



Opening the case

Remove the thumb screws as indicated. Carefully raise the panel as shown (about 30mm is enough) and pull out to remove. Reverse the procedure to replace.

DO NOT force upwards as this could cause damage to the top panel.

ODD cage removal [S14V/S16V]

Remove the top fixing screw completely. Loosen (no need to remove) the 4 fixing screws circled. Keyhole shaped holes on the base of the cage allow it to slide back and be lifted out over the screw heads, ready for ODD installation.

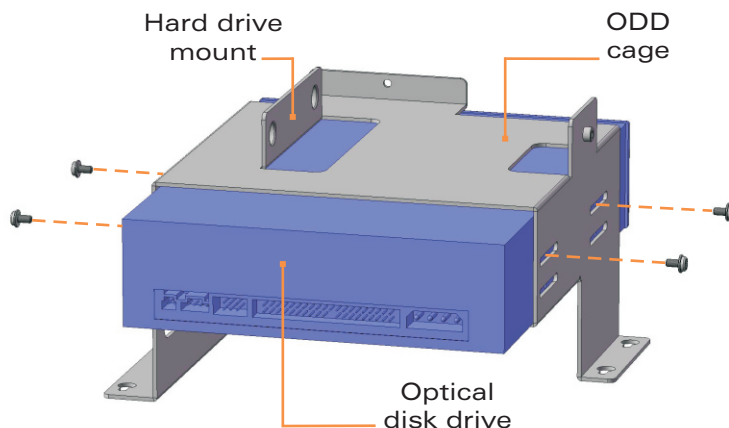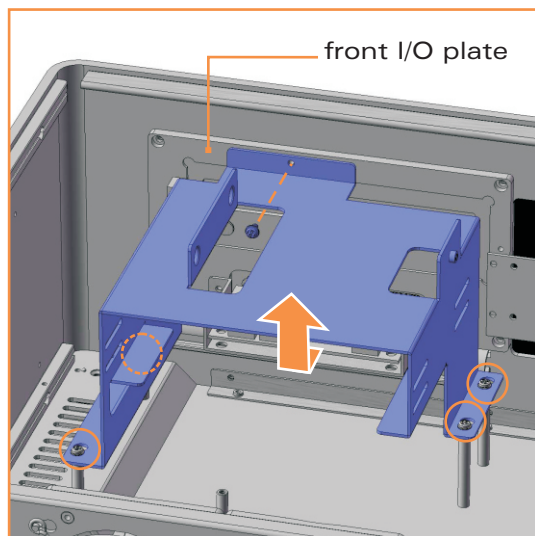


Optical disc drive installation [S14V/S16V]

Unclip the existing plastic drive bezel from your ODD. The disc tray should be ejected for this and usually requires some upward force to the bezel. Slide the optical disk drive through the front of the cage. Before securing the drive screws, check/adjust the ODD's position in the chassis - it should sit as close to the front I/O plate as possible without the drive eject button becoming depressed. Secure all fixing screws and double check the eject button functions correctly.


Metal sticker fitting instructions [S14V/S16V]

The drive format icon should also be fitted to the bezel before installation. The metal sticker sheet supplied has Blu-ray, HD-DVD or DVD icons, depending on the format being used. Ensure the bezel is free from dirt or grease. Peel and fold back the yellow backing sheet, revealing only the part you wish to use. Carefully position the icon as central as possible, then apply even pressure over the entire area. Peel off the plastic film (and unused icons) to reveal your handy work!

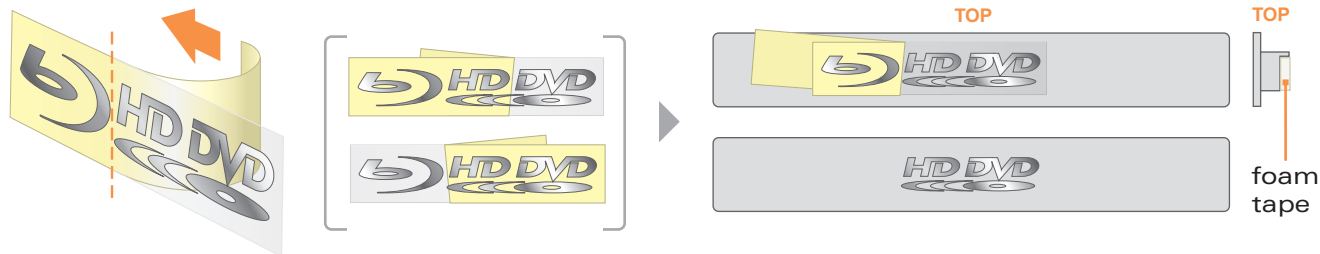


Optical disk drive (ODD) bezel installation [S14V/S16V]

The aluminum ODD bezel matches the finish of the case. The installation procedure requires that the plastic drive bezel that comes fitted to your drive, be removed prior to installation.

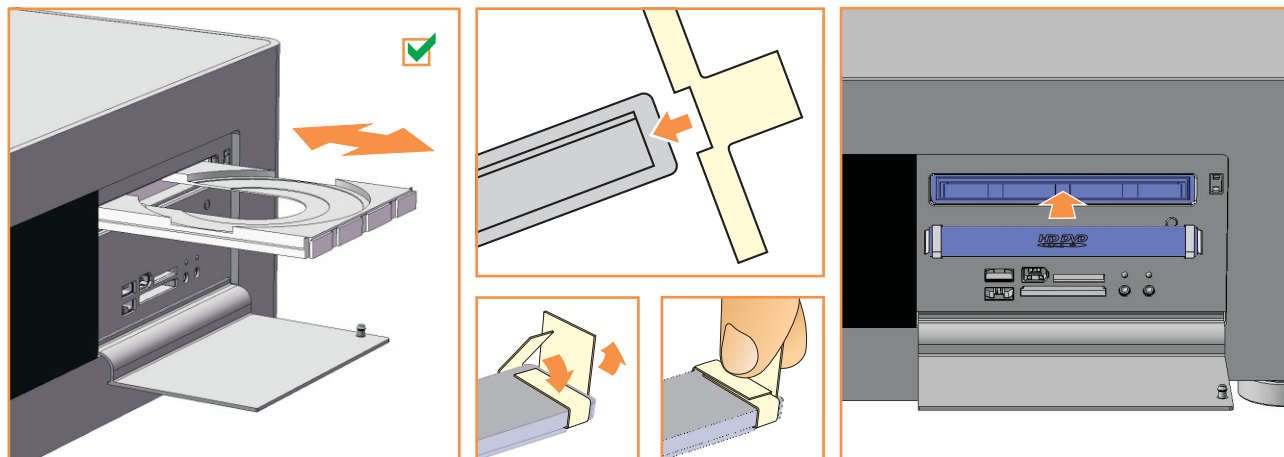


Check that the drive has been aligned correctly and that the tray can eject and close freely. Peel the back off the adhesive foam strip on the rear of the aluminium bezel. Fold a cardboard spacer around each end of the bezel, holding your thumb against the flaps as shown. With the tray closed, position inside the drive opening and press firmly against the front of the tray to ensure good adhesion. Eject the tray to remove the spacers (a gentle tug may be required).




Optical disc drive installation [S10V]

Loosen (no need to remove) the 4 fixing screws. Keyhole shaped holes allow the ODD bracket to slide up and be lifted out over the screw heads. Install the ODD as shown. Before securing the drive screws, check the ODD's position in the chassis - it should sit as close to the front I/O plate as possible without the drive eject button becoming depressed. Secure all fixing screws and check the eject button functions correctly.





12.7mm slot
load ODD

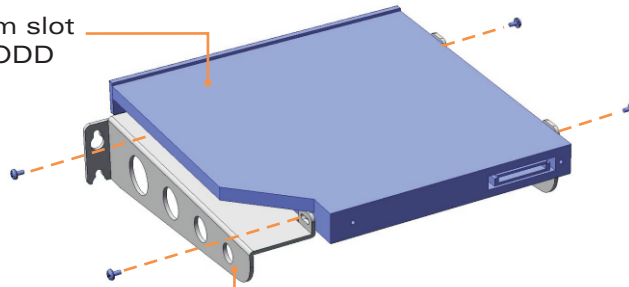

ODD
bracket


Hard Drive installation [S10V]

The S10V supports 2 hard drives. Each HD requires four anti-vibration screws, secured as shown, which will isolate the drive from the chassis once installed. A single mount bracket is push fitted over the mount screws on the one side only. The drive may then be positioned between the chassis mounts as shown, and gently pushed into place, taking care not to damage the rubber on the mount screws. One thumb screw will secure the hard drive in place.


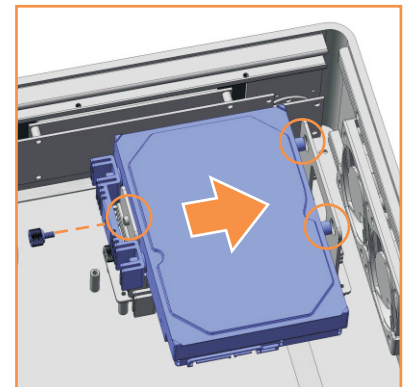
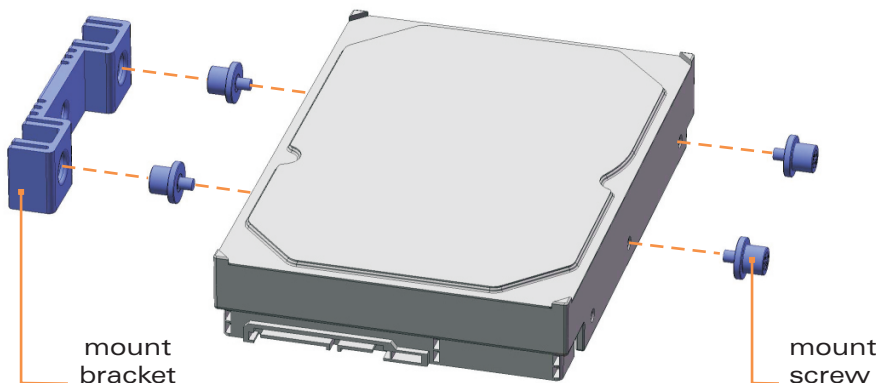


Hard Drive installation [S14V/S16V]





The S14V and S16V support up to 4 hard drives*, three in the primary HD cage and one above the ODD. Each HD requires four anti-vibration mount screws, secured as shown, which will isolate the drive from the chassis once installed. The mount bracket is only needed for the drive above the ODD and should be fitted on the one side prior to installation.

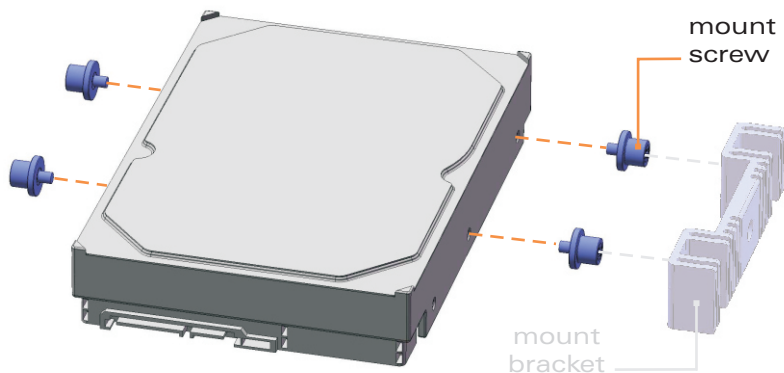

To install drives 1,2 and 3, begin by removing the two thumb screws...

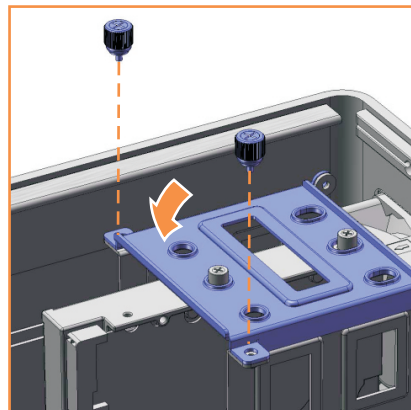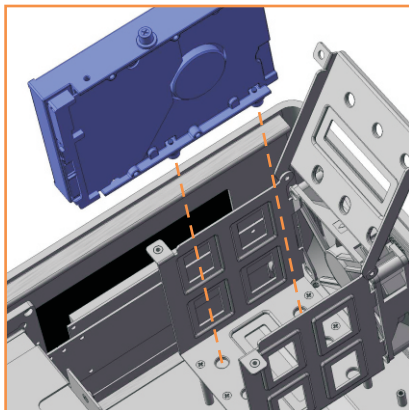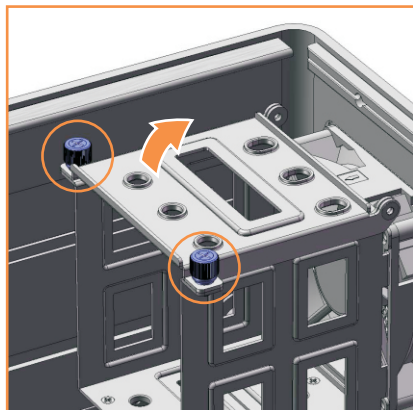


To install the 4th HD above the optical drive...



*A fifth drive can be installed to the S16V, using the HM100 hard drive mount (optional).

Auxiliary access slot [S10V/S14V]




The S14V & S10V features an auxiliary access slot on the back of the chassis, which is designed to fit all expansion brackets that are supplied with other OrigenAE products. To install, the bracket must first be unscrewed from the PCB & re-attached 'back-to-front' before fixing to the auxiliary slot. This access point could also aid any custom expansion, where external connectivity with a component or the M/B is required.

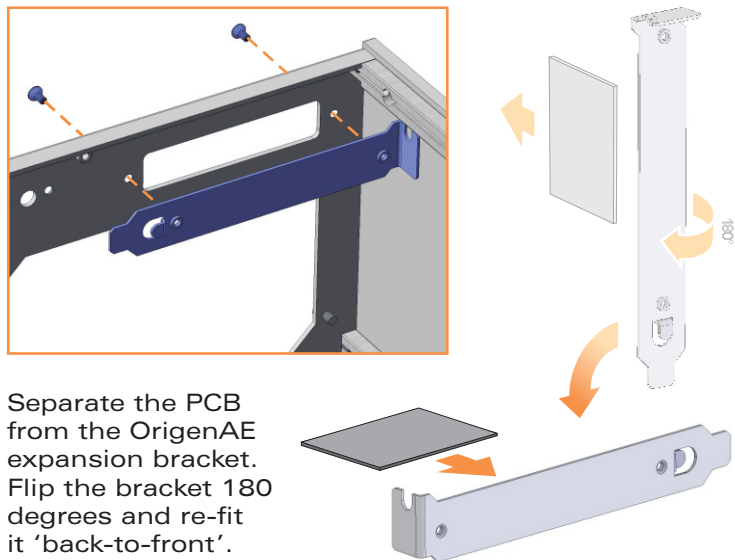

Separate the PCB from the OrigenAE expansion bracket. Flip the bracket 180 degrees and re-fit it 'back-to-front'.

IR Blaster installation [S10V/S14V]

Both the S10V & S14V have an IR blaster fixing point on the rear of the chassis, for when the optional Philips IR solution is used. This allows for more flexibility when spare expansion slots are not available. Unscrew the blaster PCB from the expansion bracket and re-install as shown.

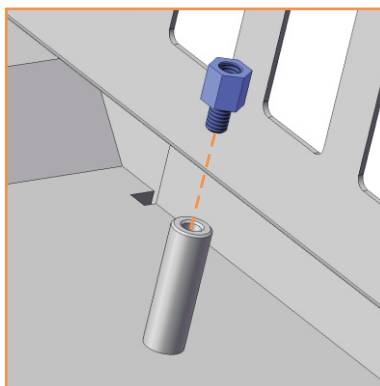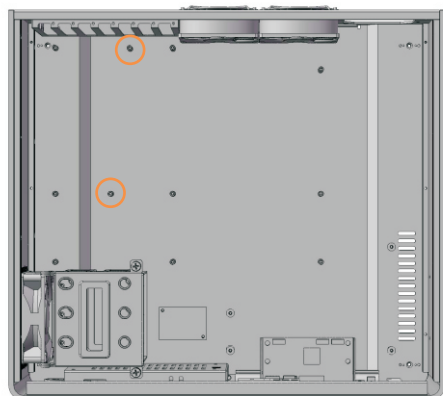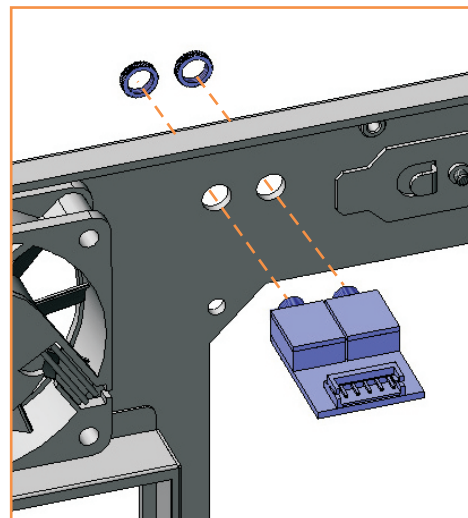

Micro ATX standoffs [S16V]

If a micro ATX motherboard is to be installed in the S16V, the spacer bolts supplied must be used. Screw the bolts into the two shorter standoffs as indicated.


Spacer bolts **MUST NOT BE INSTALLED** when a full ATX motherboard is used as damage could occur.



Multi-format card reader & I/O ports

All the S range cases come fitted with a multi-format card reader and front I/O port PCB which consist of audio in and out, 1394 and two USB ports. A built-in USB hub powers the front USB ports as well as 2 internal connectors, which are used for the IR controller, VFD or [TFT] touch panel, depending on the model. The audio ports support both AC97 and HD audio standards, while the card reader supports all the card formats listed at the bottom of the page.

- 1 - USB port
- 2 - 1394 port
- 3 - Multi format reader
- 4 - Compact flash reader
- 5 - Card reader power LED
- 6 - Activity indicator LED
- 7 - Audio in socket
- 8 - Audio out socket

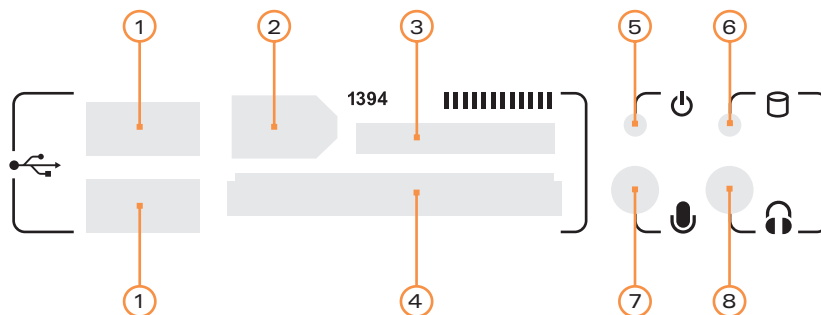


1 Compact Flash Card TYPE I	20 Secure Digital Ultra II Plus Card	39 Memory Stick (Magic Gate / High Speed data transfer compatible)
2 Compact Flash Card TYPE II	21 Secure Digital Card 45X	40 Memory Stick
3 Compact Flash Ultra Card TYPE I 45 X	22 Secure Digital PRO Card 66X	(Magic Gate / High Speed data transfer compatible with memory select function)
4 Compact Flash Ultra Card TYPE I 80 X	23 Secure Digital Card 80X	41 Memory Stick Pro
5 Compact Flash Ultra Card TYPE I 120 X	24 Secure Digital Card 133X	42 Magic Gate Memory Stick
6 Compact Flash Ultra II Card TYPE I	25 Secure Digital Card 150X	43 Magic Gate Memory Stick
7 Compact Flash Extreme Card	26 Mini Secure Digital Card	44 Memory Stick Pro HS
8 Compact Flash Extreme III Card	27 Mini Secure Digital Ultra II Card	45 Memory Stick Pro Ultra II
9 Compact Flash ELITE PRO Card	28 Mini Secure Digital Card 80X	46 Memory Stick Pro Extreme
10 Compact Flash Ultimate Card 100X	29 Mini Secure Digital PRO Card	47 Memory Stick Pro Extreme III
11 Compact Flash Ultra-X Card 140X	30 Micro Secure Digital Card	48 Memory Stick Pro
12 IBM Micro Drive Card	31 Micro Secure Digital Ultra II Card	49 Memory Stick Pro Duo
13 Sony Micro Drive Card		50 Memory Stick Pro Duo HS
		51 Memory Stick Pro Duo
14 Smart Media Card	32 Multi Media Card	52 Memory Stick Duo (Magic Gate / High Speed data transfer compatible)
15 XD-Picture Card	33 Multi Media PRO Card	53 Memory Stick Pro Duo
	34 Multi Media Plus Card	54 Magic Gate Memory Stick Duo
16 Secure Digital Card	35 Reduced Sized Multi Media Card	55 Magic Gate Memory Stick Duo
17 Secure Digital Ultra II Card	36 Reduced Sized Multi Media Mobile Card	56 Memory Stick ROM
18 Secure Digital Extreme Card		
19 Secure Digital Extreme III Card	37 Memory Stick	
	38 Memory Stick (With memory select function)	

NOTE: Card adapter required for some formats

This is a general overview illustrating how the internal PCBs interconnect. Grey PCBs/cables indicate they come as part of an optional IR kit. The VFD should be switched to 'S-GRAPH' by default, which uses the built in IR controller. Please refer to your motherboard manual for the location of the correct ports and header pins.

- 1 - VFD/IR Module (VF310)
- 2 - [VFD] IR selector switch (S-GRAPH is default)
- 3 - Main power button PCB
- 4 - Standby power 'Y' cable
- 5 - Philips IR blaster output (optional)
- 6 - Philips IR control PCB (optional)
- 7 - Card reader/USB hub PCB
- 8 - Standby ATX power cable

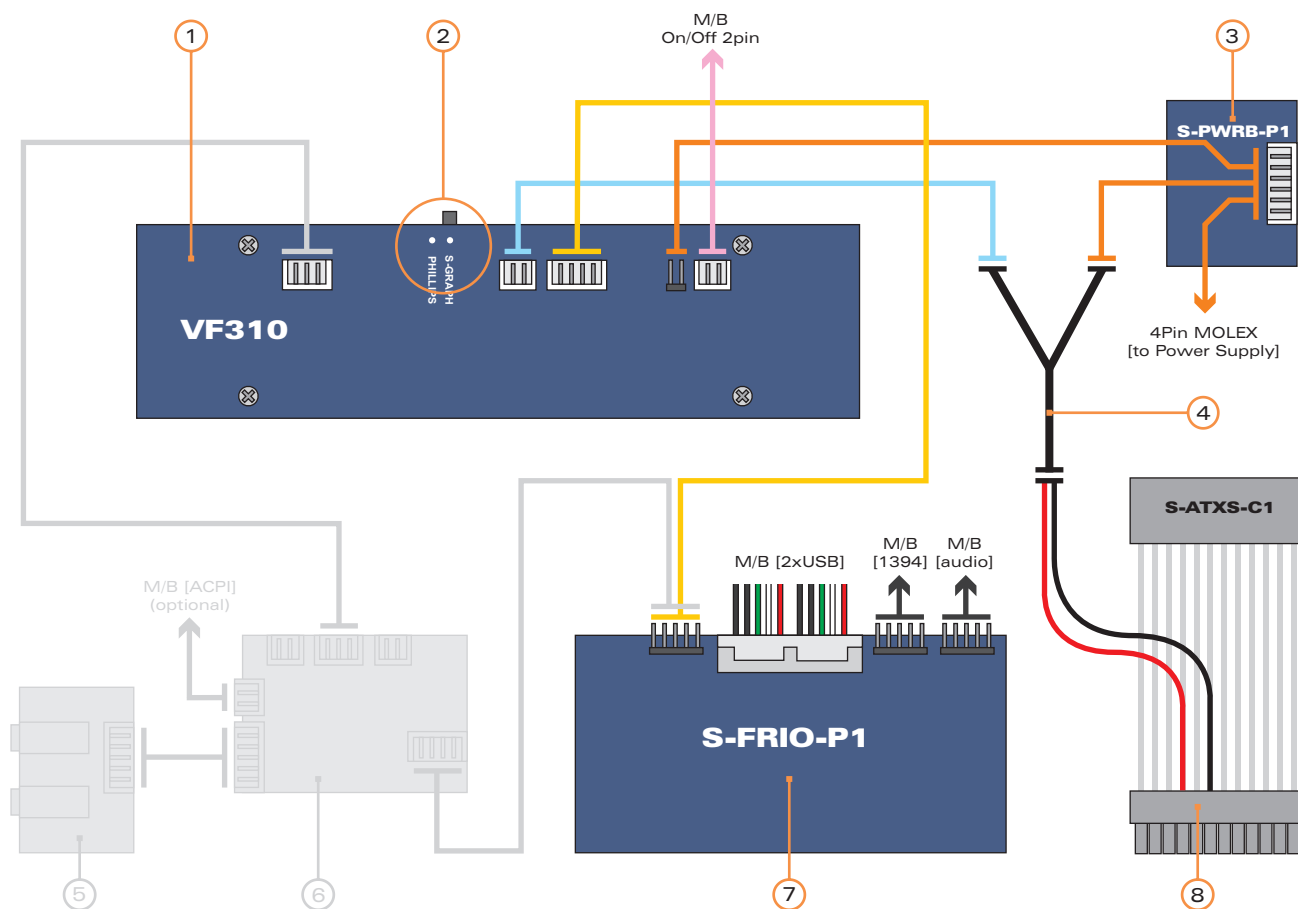

Installing VFD/IR Software


Read this notice before installation,

- The select switch must be a S-Graph in VF310 back sides S-Graph and Philips.
- The USB(S-IUSB-C2) cable must be connected to USB header pins.
- The 5V standby cable must be connected
- The display of VF310 cannot be shown before installation.


Download the latest version of VF310 software from our website, extract the files then double click setup to begin the installation. Follow these steps to complete the installation.




2. Select the language.

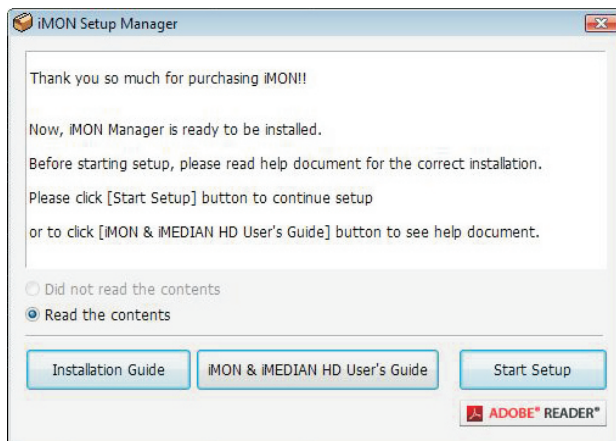


1. After opening a read the concern, Click 'Start Setup' to continue.

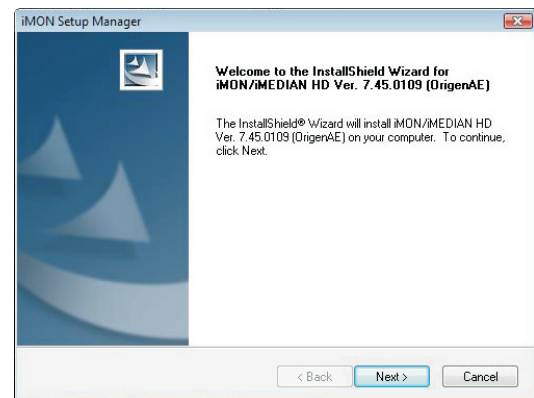

3. Click 'Next'.

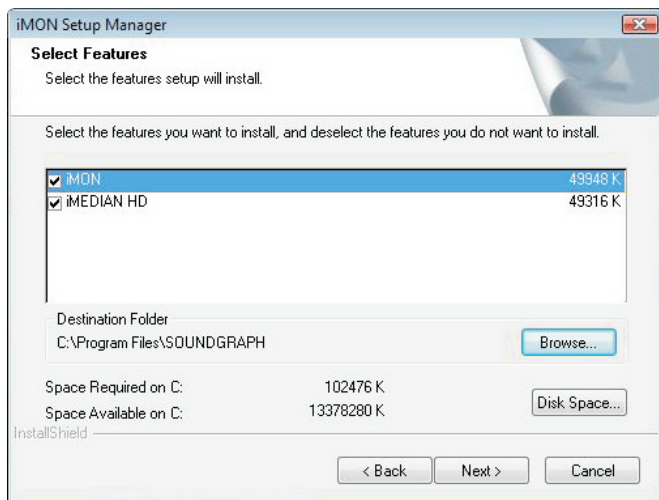

4. Select the programs. (iMON is essential and iMEDIAN HD is unessential)

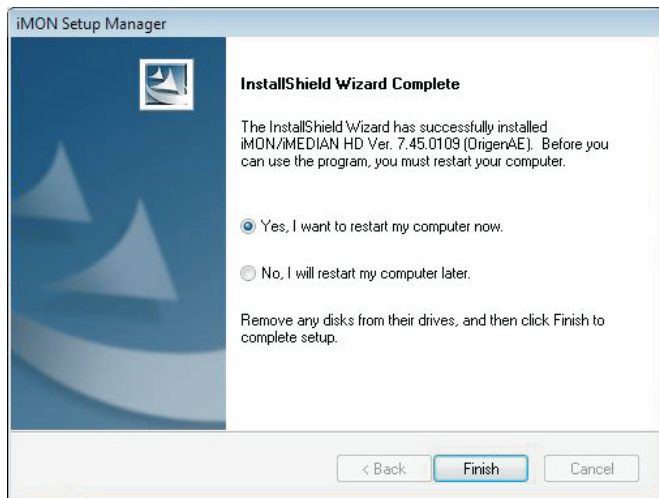

5. Click finish to next setup now.

6. Reboot computer to activate Vf310.

7. Please select the MCE remote from the option page.

Installation is now completed.
Thank you.



Global HQ
#209 Baeksan B/D
763-2 Hengsin-Dong
Dukyang-Gu
Goyang City
Gyeonggi-Do
412-220 South Korea

Website
www.origenae.com