PERFECT HOMETHEATER

2014

USER ITX-5/6 ITX-7/8

Thank you for your purchase of our product.

If you have any questions that are not covered in this manual, please contact us by phone or e-mail at Sales@PerfectHomeTheater.com.






PERFECT HOMETHEATER

Overview

CI VIC

- Power Button & LED
- 2 ODD Eject Buttor
- 3 USB Ports 2.0 & 3.0* (optional cable required. Sold separately)
- 4 IR Receiver Window
- 5 Vent IN
- 6 HDD/ODD Cage
- 7 Power Button PCB
- B Half size slot





PERFECT HOMETHEATER

Removing top panel

Attention:


Our chassis are built with very small gaps between front, top and back, so please be careful when removing and

reinstalling top panel. To avoid scratches, please loose two screws in the back and – if still doesn't go easy -

three screws in the bottom. (Two of them are hidden under feet)

Now you can easy remove top panel

PERFECT HOMETHEATER

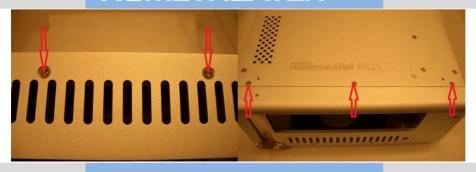

Installing HDDs and ODD

ODD/HDD bracket is hold in place by four screws. Please remove screws and remove ODD/HDD bracket.

Now you can install drives on the bracket.

First 2.5" HDD on the bottom. (If you install two 2.5" HDs). Next install SSD and ODD on the top.

2.5" HD and mounting screws. If you didn't install 2.5" HD and want to install 3.5" HD, do it now. Put HD between rubber dampers and use HD screws. Do not over tight.

All drivers on the bracket.

Put bracket with drivers aside and prepare motherboard.



HOMETHEATER







Motherboard installation

Install CPU and memory on motherboard, connect PSU and test your motherboard. Set BIOS, check temperatures. If everything is OK, install backplate and motherboard inside of the chassis.

Connect PSU and cables, install bracket with drives and test them. When everything is OK, install top cover, tighten bottom and back screws, install back feet (if removed) and enjoy your system.



Perfect Home Theater 163 America Blvd Ashland MA 01721-1869

www.shop.perfecthometheater.com



